





...imagine the difference.



POLYSTYRENE GEOTEXTILE GRID
DRAINAGE SYSTEM - 1/8" TO 1/4"
HIGH

1 3/4" NON INFILL WITH NYLON TATCH OR
MONOFILAMENT, 2 1/8" POLYETHELENE FIBERS
WITH 100% CRYOGENIC GROUND RUBBER INFILL.
STOPS AND/OR BORDERS ARE REQUIRED FOR THIS
TYPE OF INSTALLATION.

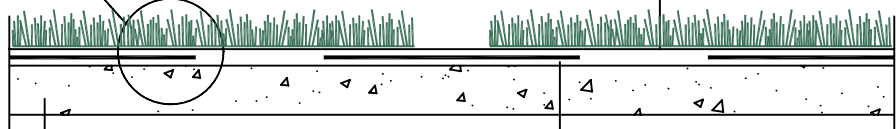

EXISTING CONCRETE WALKWAY
AND/OR ROOF TOP CONNCRETE
SLAB

GEOTEXTILE GRID MECHANICALLY
FASTEN TO EXISTING CONCRETE SLAB AS
REQUIRED BY MANUFACTURER SPEC'S.

PLEASE NOTE FOR CRITICAL AREAS - AREAS AROUND POOL OR WHERE SLOPE
OF SURFACE AREA EXCEEDS 45° A NON INFILL PRODUCT IS RECOMENDED

ARTIFITIAL TURF ON CONC. SLAB DETAIL

THESE DRAWINGS ARE THE PROPERTY OF AGL *grass* AND ARE NOT TO BE COPIED, REPRODUCED, ALTERED OR USED WITHOUT THE EXPRESS WRITTEN CONSENT OF THE DESIGNER.

SECTION 1
BASE DESIGN GUIDELINES

ARTIFICIAL TURF INSTALLATION
ON CONCRETE SLAB

DATE : FEBRUARY 4, 2009

SCALE : NOT TO SCALE

DETAIL No. AGL-005