...imagine the difference.

OPTION No.1
2"x4" PRESSURE TREATED WOOD NAILER / COMPOSITE 2"x4" NAILER (COMBINATION OF WOOD AND PLASTIC) FASTENED TO CURB AND/OR SIDEWALK AS REQUIRED.

OPTION No.2
12" LG. GALVANIZED SPIKES AND 8" LG. LANDSCAPE STAPLES EVERY 6" STAGGERED ALL AROUND PERIMETER AS REQUIRED.

MONOFILAMENT, 2 1/8" POLYETHELENE FIBERS WITH 100% CRYOGENIC GROUND RUBBER INFILL.

2" TO 4" LIMESTONE SCREENINGS (MINIMUM OF 2")

GRADE OUTSIDE FIELD, SIDEWALK AND/OR CURB AS REQUIRED

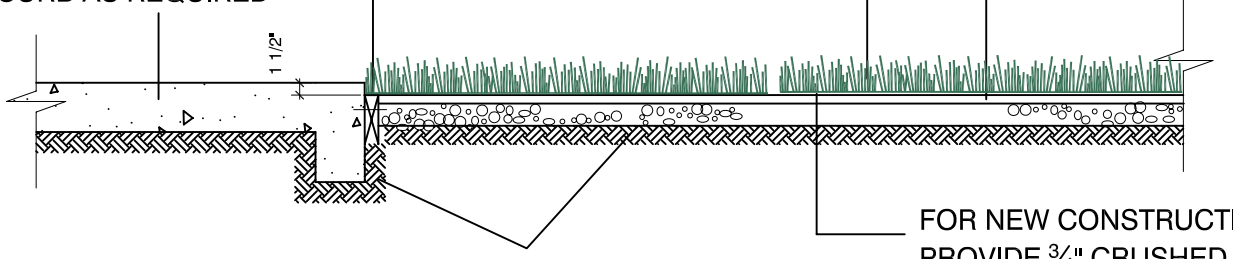

FOR NEW CONSTRUCTION PROVIDE ¾" CRUSHED STONE

EXISTING SUBGRADE TO REMAIN

TYPICAL NAILER AND BASE DETAIL

THESE DRAWINGS ARE THE PROPERTY OF AGL *grass* AND ARE NOT TO BE COPIED, REPRODUCED, ALTERED OR USED WITHOUT THE EXPRESS WRITTEN CONSENT OF THE DESIGNER.